



K221MK2



K221MK2

Technical Specifications

Type	Double 21" hybrid bass reflex horn heavy duty subwoofer
Frequency response	35Hz - 300Hz+/-3dB, -10dB@25Hz
Drivers	2 x 21"/6" VC LF woofers
Rated power(RMS)	2000W
Recommended AMP	3000 - 4000W into 4 ohms
Sensitivity(1W/1M)	108dB
Maximum SPL	141dB continuous, 147dB peak
Nominal impedance	4 ohms
Finish	Sanding texture paint
Protective grille	With / without black perforated steel
Connectors	2 x Neutrik speakon NL4
Dimensions	(W)1680 x (H)700 x (D)1055mm
Weight	170KG

Description

K221MK2 is a horn loaded subwoofer that incorporates dual 21"/6" VC neodymium woofers that deliver the low down to 25Hz without compromise. The folded horn enables the enclosure to contain a longer sound path and has been acoustically optimized to achieve high output and low distortion whilst maintaining clarity and impact. Birch plywood cabinet is equipped with flush handles, steel grill, locating feet, slots, heavy duty wheels and speakon NL4 connectors.

Features


4000W AES power handling	Improved transient and phase response
High definition bass	Low distortion horn design for maximum sound pressure level

Applications

Outdoor bass line source	Touring sound reinforcement
Live music entertainment venues	Stadiums, arenas, concert halls and theaters


FREQUENCY

File: C:\MLS\QC\NP212.FRQ 3-20-2020 12:36 PM (equalized)
Sensitivity Mag - dB SPL/watt (8.0 ohms, @2.00 M) (0.10 oct)

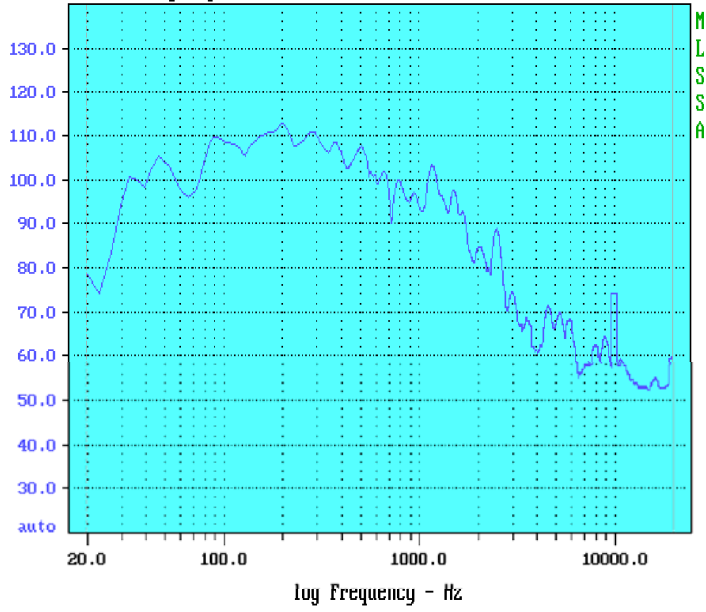

IMPEDANCE

File: C:\MLS\QC\NP212I.FRQ 3-20-2020 12:37 PM (equalized)
Impedance Mag - ohms (0.10 oct)

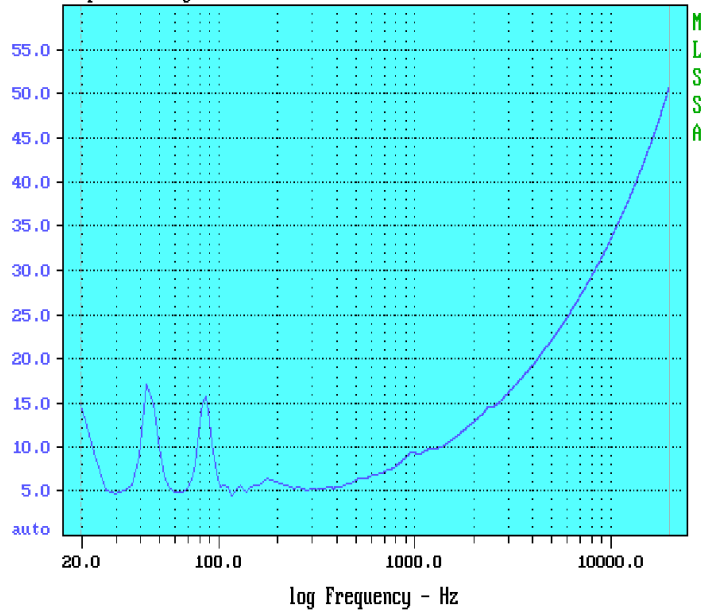

DRAWING

